## ENVIRONMENT CLEARANCE COMPLIANCE REPORT (April 2019-September 2019)

for

# GRANITE BUILDING STONE QUARRY (Minor Mineral)

Extent: 4.0 Ha. (9.8840 Acres)

At

Sy No.

86/2,87,88/2,88/3,88/1,89/2B,147/2,139/1

Village

Kolavallur

Taluk

Thalassery

District

Kannur

State

Kerala,

'Granite Building Stone Quarry of Mr. C.G.George.' E.C.No:623/SEIAA/EC4/4806/2014, Dated:01.06.2016

Compliance Status of the General Conditions for Mining Projects Laid down by the State Environment Impact Assessment Authority, Kerala vide their Environment Clearance No.75/2016, Dated: 01/06/2016.

#### **SPECIFIC CONDITIONS**

Sl. No	Condition	Status of Compliance
1	A Mines Manager shall be appointed to control, direct, manage and supervise Quarrying Operations as required under the Mines Act 1952.	A Permit manager is appointed to supervise Quarrying Operations.
2	Health and welfare measures for the persons employed shall be implemented.	Health and welfare measures for the employees is being implemented.
3	Controlled blasting should be practiced, and blasting should be done only during daytime. The mitigating measures for control of ground vibrations to arrest the fly rocks and boulders should be implemented.	All precautionary measures are adopted while blasting operations are carried out.  I. No secondary blasting like Pop Shooting or Plaster Shooting are undertaken for breaking down large boulders, to avoid Air Blast and Fly Rocks. Only rock breakers will be used for breaking down bigger boulders.  II. Additional precaution of controlled blasting with sandbags and wire mesh/blasting pads are used so that there are no fly rocks from the blast
4	Plantation shall be done which includes a green belt of adequate width around the Mining Lease area excluding the rocky area, along roads, overburden dumps and nonmineralized area by planting suitable native species in consultation with the local DFO/ Agriculture Department.	A green belt of a width of 7.5 mts has been made along the periphery of the Lease area by planting local species saplings. Plantation at other places will be undertaken in a phased manner after starting Quarrying operations.
5.	The drains should be regularly desilted and maintained properly. Check dams and gully checks shall be constructed wherever required to arrest siltation. De siltation shall also be done every year before the onset of monsoon.	All civil structures made for arresting silt will be de silted before onset of Monsoon.
6	Fencing must be maintained properly all around the lease area.	The entire lease area is fenced and is well maintained.

7	The CSR should cover the felt needs of the locality with special emphasize for implementing ground water recharging techniques in and at the vicinity of the proposed site.	CSR works is presently implemented. Balance works will be taken up in due course of time. (Photos of CSR activities are attached as <b>Annexure-4</b> )
8	Appropriate sign boards should be displayed	Signboards have been displayed. (Photos are attached as <b>Annexure-1</b> )
9	The blasting time must be displayed and strictly adhered to.	Blasting time is displayed.
10	Dust suppression mechanism must be in place.	Water tankers with sprinklers are in use.
11	A separate small plot to be maintained in the premise to preserve rare and endemic species, if any, listed in the bio diversity assessment, etc.	No rare and endemic species is present in the lease area.
12	The PPV values must be less than 10 mm/sec.	PPV values will be kept below 10 mm/sec.
13	The green belt shall be provided along the periphery.	Green belt of 7.5 mts width has been provided along the periphery of the lease.
14	Where the height of the bench formed during earlier workings exceeds the maximum reach of the excavator engaged for work, such bench height shall be reduced from top to bottom.	Height of benches will be maintained as specified in the approved Mining Plan.
15	Loose or hanging rock or mineral boulder on the side wall shall be dressed down before engaging persons for work at the bottom of the bench.	Benches will be properly dressed by excavators or by manual means.
16	Permanent boundary pillars should be fixed by the proponent before commencing quarrying.	Permanent boundary pillars have been fixed.
17	No quarry blasting to be undertaken and sustained till warning time limit expires and/or when continuous 48 hours rainfall exceeds 8cms and blasting shall not be resumed until 24hours of rain free situation arises in the quarry locality based on the evaluation by the revenue officials.	Agreed.
18	All waste dumps and top soil dumps shall be properly stabilized using coir	Coir mats shall be used to cover waste dumps. Proper drainage system shall

	mats or bio regeneration. Proper drainage system shall be provided so that water is properly diverted away from the dumps slopes with no disturbance to the stability of the slopes.	be provided so as to avoid destabilizing of dumps.
19	All dump slopes shall be sufficiently stabilized by using appropriate species mix of grass, creepers, shrubs and trees. This shall be done in consultation with the Forest department and local research institutes and experts I stabilization of mine dumps.	All dump slopes will be stabilized as specified.
20	Garland drains of at least 2 mts width shall be provided all along 7.5 mts buffer zone to divert the water from entering the Quarry slopes. These drains shall be cleaned every year before the monsoon season	Garland drains of 2 mt width will be constructed.
21	The water from the garland drainage shall be directed to the silt settling ponds. The clarified overflow from the silt settling ponds shall be directed to a Rain Water Harvesting (RWH) pond before releasing the clarified water to the natural water course.	Only clear natural water is let out into the natural water course.
22	A retaining wall of stone rubble with wire (2 mt) shall be constructed at the bottom of the slope of the Quarry lease to arrest any likely mesh of sufficient width and strength (not less than roll of boulders during heavy rainfall.	Will be constructed.

### **GENERAL CONDITIONS OF HEALTH**

Sl.No.	Conditions	Status of compliance
1	First Aid kit provided in the work site.	First Aid kits are provided in the work
	It shall be periodically maintained	site and key personnel will be trained
	properly. Some labourers shall be	to render first aid in case of
,	trained on First Aid.	emergencies.
2	Wholesome drinking water should be	Wholesome potable drinking water is
	provided.	provided. (Photos of drinking water
		facility is attached as Annexure-3)
3	Premises should be maintained as wet	Dust will be suppressed at the source.
	to suppress the dust.	
4	Sanitary type of latrines and urinals	Latrines and urinals are provided.
all To	should be provided.	

5.	Resting place to be provided for workers	Resting place is provided to workers.
6	'No Smoking' board should be exhibited according to COTPA act.	'No Smoking' board is exhibited.
7	Work should not be done in night.	Work is done only during day light.
8	Details of nearest hospital, shortest route to hospital and contact no. etc. should be available	Emergency contact numbers of Key persons, Hospitals, police station, etc. is prominently displayed.
9	Approach roads should be maintained properly	Approach roads are well maintained.

### **GENERAL CONDITIONS**

Sl.No	Condition	Compliance Status
1	Rainwater harvesting facility should be	Rainwater harvesting facility shall be
	installed as per prevailing provisions of	installed.
	KMBR/KPBR, unless otherwise	
	specified.	
2	Environment Monitoring Cell as agreed	Environmental Monitoring Cell has
	under the affidavit filed by the	been formed and is headed by Mr. C.G.
	proponent should be formed and made	George
	functional.	
3.	Suitable avenue trees should be planted	Local species saplings procured from
	along either side of the tarred road and	Forest department and planted before
	open parking areas, if any, including	onset of monsoons.
1	approach roads and internal roads.	Min a an avatag anly, during daylight
4	Maximum Possible Solar Energy	Mine operates only during daylight hence there is no need for any
	generation and utilization shall be ensured as an essential part of the	additional lighting.
	Project.	additional lighting.
5	Sprinklers shall be installed and used in	Water tankers with sprinklers are in
J	the Project Site to contain dust	use.
	emissions.	
6	Eco-restoration, including the Mine	Agreed.
	Closure Plan shall be done at the own	
	cost of the Project Proponent.	
7	At least 10 per cent of total excavated	Agreed.
	Pit area should be retained as water	
	storage area and the remaining area	
	should be reclaimed with stacked	
	dumping and overburden and planted	
	with indigenous plant species that are	
	eco-friendly, if no other specific	
	condition on reclamation of the Pit is	
	stipulated in the EC.	*** 1
8	Corporate Social Responsibility (CSR)	We have implemented CSR activities.
	agreed upon by the Proponent should	The balance agreed commitments and
	be implemented.	will be undertaken shortly.
	The Lease area will be fenced off with	Lease area is fenced off.
	barbed wires to a minimum height of 4	Sign boards have been erected at

7		
	ft around, before starting of Mining. All	prominent places.
	the boundary indicators (boards, stores,	
9	markings, etc.) shall be protected at all	
181 PALSO	times and shall be conspicuous.	
10	Warning alarms indicating the time of	Necessary precautions while blasting
	Blasting (to be done at specific timings)	is taken.
	has to be arranged as per stipulations of	
	the Explosives department.	
11	Control measures on noise and	Noise and vibrations are kept within
	vibrations prescribed by KSPCB should	KSPCB prescribed norms.
	be implemented	<ol> <li>Use of sharp drilling, delivery</li> </ol>
		of compressed air at optimal
		pressure.
		II. Proper maintenance of
		compressor, drilling machine,
		jackhammers and tipper
		trucks.
		III. Regular monitoring of noise
		levels are being done within
		the core zone and the buffer
		zone of the mining lease area.
12	Quarrying activities should be limited	Quarrying activities limited to
14	to daytime as per KSPCB	daytime.
	guidelines/specific conditions.	day time.
13	Blasting should be done in a controlled	Blasting is done in a controlled
13	manner as specified by the regulations	manner and is done technically as
	of the Explosives department or any	prescribed by the mining statutes.
	other agency.	Only a small diameter drill holes of
	other agency.	33/48mm diameter with 25mm
		cartridges slurry/emulsion explosive
		are used for blasting, no large
		diameter holes are proposed for
		blasting. With optimum blast design,
		effective blasting techniques with
		delay detonators and low charges per
		delay, carte has been taken to limit
		the blast vibrations and the PPV value
		below 10mm per second. (Photos of
		Blasting siren is attached as
4.4	A 1: 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	Annexure-2)
14	A licensed person should	Blasting supervision and control is
	supervise/control the Blasting	done by a Mining Official having
	Operations	DGMS Certificate.
15	The state of the s	
	Access road to the quarry shall be	Access road to the Quarry is tarred.
	Access road to the quarry shall be tarred to contain dust emissions that	
	Access road to the quarry shall be	
	Access road to the quarry shall be tarred to contain dust emissions that	
16	Access road to the quarry shall be tarred to contain dust emissions that may arise during transportation of	

	reclamation of Mine Pit as per Mine	Belt for plantation purpose.
	closure Plan/specific conditions	
17	Height of Benches should not exceed 5	Agreed.
	M and width should not be less than 5	
	M, if there is no mention in the Mining	
10	Plan/specific conditions	
18	Mats to reduce fly rock blast to a	Controlled blasting technique is
	maximum of 10 PPV should be provided	adopted. PPV is kept to a minimum.
10	Mariana Janub - CMining Community	Delay detonators are used.
19	Maximum depth of Mining from general	Agreed.
	ground level at site shall not exceed 10	
20	Ma Mining an arction a should be corried	Agus ad
20	No Mining operations should be carried	Agreed.
	out at places having a slope greater	
21	than 45°	Cauch on unit is not in stall od within
21	Acoustic enclosures should have been	Crusher unit is not installed within
	provided to reduce sound	Mining Lease.
	amplifications in addition to the	
	provisions of green belt and hollow	
	bricks envelop for crushers so that the	
	noise level is kept within prescribed	
-	standards given by CPCB/KSPCB.  The workers on the site should be	Doguisita Danganal Protestiva
22		Requisite Personal Protective
22	provided with the required protective	equipments (PPE's) is provided as
22	equipment such as earmuffs helmet, etc. Garland drains with clarifiers to be	required to all employees.
23	95 See 98 182 USS 199 199 199	Garland drains are constructed
	provided in the lower slopes around the core area to channelize storm water.	
24	2 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	All trucks transporting motorial are
24	The transportation of minerals should be done in covered trucks to contain	All trucks transporting material are
	dust emissions.	covered by firmly tied tarpaulin
25	The proponent should plant trees at	Local enocioe caplinge have been
23	least 5 times the loss that has been	Local species saplings have been procured from the Forest dept,
		Kannur
	occurred while clearing the land for the project.	Kalliui
26		Spont oil is rouged as a lubricant for
26	Disposal of spent oil from diesel engines should be as specified under	Spent oil is reused as a lubricant for
	_	drilling.
27	relevant Rules/Regulations. Explosives should be stored in	Explosives is stored in a Licensed
27	magazines in isolated place specified	Explosives is stored in a Licensed Explosives Magazine, which is
	and approved by the Explosive	approved by PESO. (Copy of the
	Department.	Explosive license is attached as
	Department.	Annexure-6)
28	A minimum buffer distance of 100 M	No dwellings are situated within 100
20	from the boundary of the quarry to the	M from the boundary of the quarry.
	nearest dwelling unit or other	In It off the boundary of the quarry.
	structures, not being any facility for	
	mining shall be provided.	
	mining shall be provided.	

29	100 M buffer distance should be	Mining area is not located near any
29	maintained from forest boundaries	Mining area is not located near any forest areas.
20		
30	Consent from Kerala State Pollution	Consent from KSPCB under Air and
	Control Board under Water and Air	Water Act(s) is obtained.
	Act(s) should be obtained before	
	initiating mining activity.	
31	All other statutory clearances should be	All statutory clearances obtained.
	obtained, as applicable, by project	The DGMS permission is under
	proponents from the respective	process.
	competitive authorities including that	
	for blasting and storage of explosives.	
32	In the case of any change(s) in the	There is no change in the scope of
	scope of the Project, extent, quantity,	mining.
	process of mining technology involved	
	or in any way affecting the environment	
	parameters/impacts as assessed, based	
	on which only the EC is issued, the	
	project would require a fresh appraisal	
	by this Authority, for which the	
	proponent shall apply and get the	
	approval of this Authority.	
33	The Authority reserves the right to add	Agreed.
227.5	additional safeguard measures	
	subsequently, if found necessary, and to	
	take action including revoking of the	
	Environmental Clearance under	
	provisions of the Environment	
	(Protection) Act,1986, to ensure	
	effective implementation of the	
	suggested safeguard measures in a time	
	bound and satisfactory manner.	
	bound and sadstactory manner.	

34		Agreed.
544	The stipulations by the Statutory Authorities	
	under different Acts and Notifications	
	should be complied with including the	
	provisions of the Water (Prevention and	
	control of Pollution) Act, 1974, the Air	
	(Prevention and control of Pollution)	
	Act1981, the Environment (Protection)	
	Act,1986, the Public Liability (Insurance)	
	Act,1991 and EIA Notification,2006	
35	The project proponent should advertise in at	Advertisements informing EC
	least 2 newspapers widely circulated in the	accordance to the Project is done
	region, one of which(both the advertisement	in 2 no's newspapers.
	and the newspaper) shall be in the	
	vernacular language informing that the	
	Project has been accorded Environment	

-		T
.36	Clearance and the copies of the Clearance letters are available with the State Environment Impact Assessment Authority (SEIAA) office and may also be seen on the website of the Authority at <a href="https://www.seiaakerala.org">www.seiaakerala.org</a> . The advertisement should be made within 10 days from the date of receipt of the clearance letter and a copy of the same signed in all the pages should be forwarded to the Office of this Authority as confirmation  A copy of the clearance letter shall be sent by the proponent to the concerned Gram Panchayat/District  Panchayat/Municipality/Corporation/Urban	A copy of the Clearance is submitted to the Kunnothparamba Gram Panchayat on. ( A copy of
	local Body and also to the Local NGO, if any from whom suggestions/representations, if any were received while processing the proposal. The Environmental Clearance shall also be put on the website of the company by the proponent.	panchayat on. ( A copy of panchayat license is attached as <b>Annexure-7</b> )
37	The proponent shall submit half yearly reports on the status of compliance of the stipulated EC conditions including results of monitored data (both in hard copies as well as by e-mail) and upload the status of compliance of the stipulated EC conditions, including results of monitored data on their website and shall update the same periodically. It shall simultaneously be sent to the respective Regional office of the MOEF, Govt. of India and also to the State Environment Impact Assessment Authority (SEIAA) office	Half yearly reports is submitted as stipulated (Photos of monitoring is attached as <b>Annexure-5</b> )
38	The details of Environment Clearance should be prominently displayed in a metallic board of 3 ft x 3 ft with green background and yellow letters of Times Roman font of size not less than 40. Sign board with extent of Lease area and boundaries shall be depicted at the entrance of the quarry, visible to the public	Details of Environmental Clearances are prominently displayed at the entrance to the Mine. (photo of the sign board is Attached as <b>Annexure-1</b> )
39	The proponent should provide notarized affidavit (indicating the number and date of Environmental Clearance proceedings) that all the conditions stipulated in the EC shall be scrupulously followed.	Provided.
40	No change in mining technology and scope	Prior approval from the SEIAA

	of working should be made without prior approval of the SEIAA. No further expansion or modifications in the mine shall be carried out without prior approval of the SEIAA, as applicable.	will be sought in case of change of mining technology.
41	The Project proponent shall ensure that no natural water course and/or water resources shall be obstructed due to any mining operations. Necessary safeguard measures to protect the first order streams, if any, originating from the mine lease shall be taken.	No natural water course is obstructed. Necessary safeguard measures will be taken to protect first order streams if originating from the mining lease in the future.
42	Monitoring of Ambient Air Quality to be carried out based on the Notification 2009, as amended from time to time by the Central Pollution Control Board. Water sprinkling should be increased at places loading and unloading points & transfer point to reduce fugitive emissions.	Monitoring of Ambient Air Quality will be carried out. Water sprinkling will be done at all places appropriately. (Photos of monitoring is attached as <b>Annexure-5</b> )
43	The top soil, if any, shall be temporarily be stored at earmarked site(s) only for the topsoil shall be used for land reclamation and plantation. The Over burden (OB) generated during the mining operations shall be stacked at earmarked dump site(s) only. The maximum height of the dumps shall not exceed 8 m and the width 20 m and overall slope of the dumps shall be maintained to 45°. The OB dumps should be scientifically vegetated with suitable native species to prevent erosion and surface run off. In critical areas, use of geo-textiles shall be undertaken for stabilization of the dump. The entire excavated area should continue until the vegetation becomes self-sustaining	Available topsoil will be used at the Green belt for plantation.  OB generated is used for plantation purposes along the Green/Safety zone.
44	Catch drains and siltation ponds of appropriate size shall be constructed around the mine working, mineral and OB dumps to prevent run off of water and flow of sediments directly into the river and other water bodies. The water so collected should be utilized for watering the mine area, roads, green belt development, etc. The drains shall be regularly de silted particularly after monsoons and maintained properly	Catch drains are made along the periphery of the mining lease.
45	Effective safeguard measures such as regular water sprinkling shall be carried out in critical areas prone to air pollution and having high levels of PM10 and PM2.5 such	Regular water sprinkling is done on haul roads with water tankers.

	as haul road, loading and unloading points and transfer points-it shall be ensured that the Ambient Air Quality parameters conform to the norms prescribed by the Central Pollution Control Board in this regard.	
46	Fugitive dust emissions from all sources should be controlled regularly. Water spraying arrangements on haul roads, loading and unloading and transfer points should be provided and properly maintained.	Fugitive dust emissions is controlled.
47	Measures should be taken for control of noise levels below 85 dB(A) in the work environment.	Adequate measures for noise control is adopted.
48	A separate environmental management cell with suitable qualified personnel should be set up under the control of a senior executive, who will report directly to the head of the Organization.	An Environment Management Cell is set up under the control of the Mines Manager.
49	The funds earmarked for environment protection measures and CSR activate should be kept in a separate account and should not be diverted for other purpose. Year wise expenditure should be reported to the State Environment Impact Assessment Authority (SEIAA) office.	Funds earmarked for environment protection measures and CSR will be made available.
50	The Regional Office of MOEF and CC located in Bangalore shall monitor compliance of the stipulated conditions. The Project authorities should extend full cooperation to the Officer(s) if the Regional Office by furnishing the requisite data/information/monitoring reports.	We will extend full cooperation to any officer(s) from the Regional Office during his/their visit. All available data will be provided.
51	Any appeal against the Environment Clearance shall lie with the National Green Tribunal, if preferred, within a period of 30 days as prescribed under Section 16 of the National Green Tribunal Act, 2010	Agreed.
52	Concealing the factual data or submission of false/fabricated data and failure to comply with any of the conditions mentioned above may result in withdrawal of this clearance and attract action under provisions of the Environment (Protection) Act, 1986.	Factual and true data will be submitted.
53	The SEIAA may revoke or suspend the order for non-implementation of any of the specific or this implementation of any of the above conditions is not satisfactory. The SEIAA reserves the right to alter/modify the	Agreed.

	above conditions or stipulate any further condition in the interest of the environment protection	
54	The above conditions shall prevail not withstanding anything to the contrary, inconsistent or simplified, contained in any other permit, license on consent given by any other authority for the same project.	Agreed.
55	The order is valid for a period of 5 years of the expiry date of Mine lease period issued by the Government of Kerala, whichever is earlier	Agreed.
56	The Environment Clearance will be subject to the final order of the courts in any pending litigation related to the land or the project, in any court of law.	Agreed.
57	The Mining operations shall be restricted to above ground water table and it should not intersect ground water table.	Mining operations will be restricted to above ground water table and due care will be taken so as not to intersect ground water.
58	All vehicles used for transportation and within the mines shall have 'PUC' certificate from authorized pollution checking center. Washing of all vehicles shall be inside the Lease area	Will ensure that all transportation vehicles have PUC issued by an authorized Pollution checking center.
59	Project proponent should obtain necessary prior permission of the competent authorities for drawl of necessary quantity of surface and ground water for the project.	Agreed.
60	Regular monitoring of flow rates and water quality upstream and downstream of the springs and perennial nallahs flowing in and around the mine lease area shall be carried out and reported in the six-monthly reports	No perennial nallah flows through the lease or exist around the Mine Lease.

61	Occupational health surveillance	Occupational health surveillance will
	program of the workers should be	be undertaken.
	undertaken periodically to observe	
	any contractions due to exposure to	
	dust and take corrective measures, if	
e.	needed.	

For 'Granite Building Stone of Mr. C.G. George'


(Mr.C.G. George) Co-Owner

Co- Owner Date: 26.12.2019

### **SIGN BOARDS AND E.C. BOARDS:**






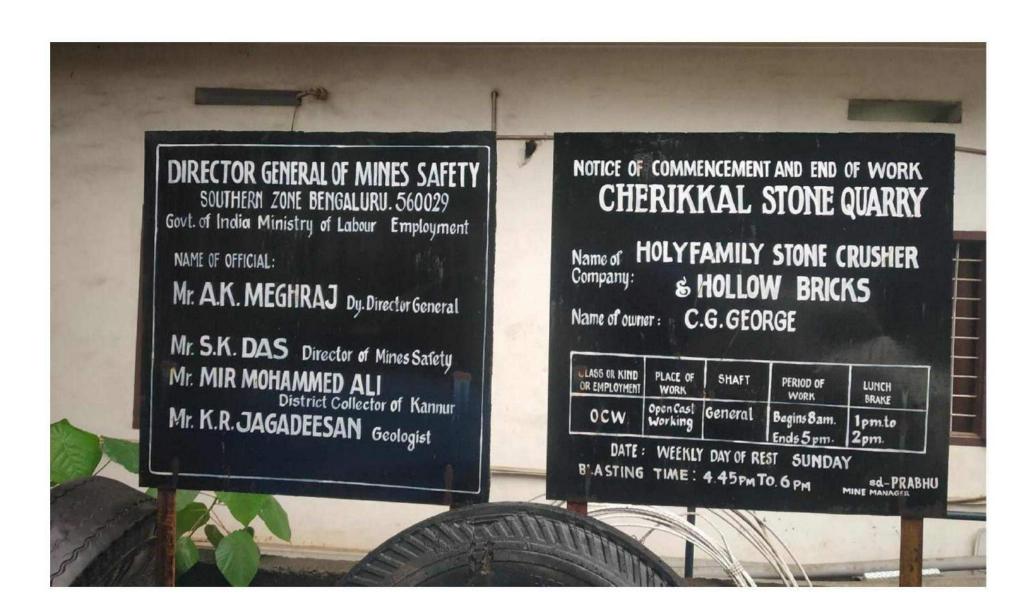

### **ELECTRIC BLASTING SIREN INSTALLED AT MINES:**



### **PURIFIED DRINKING WATER FACILITY AT SITE:**

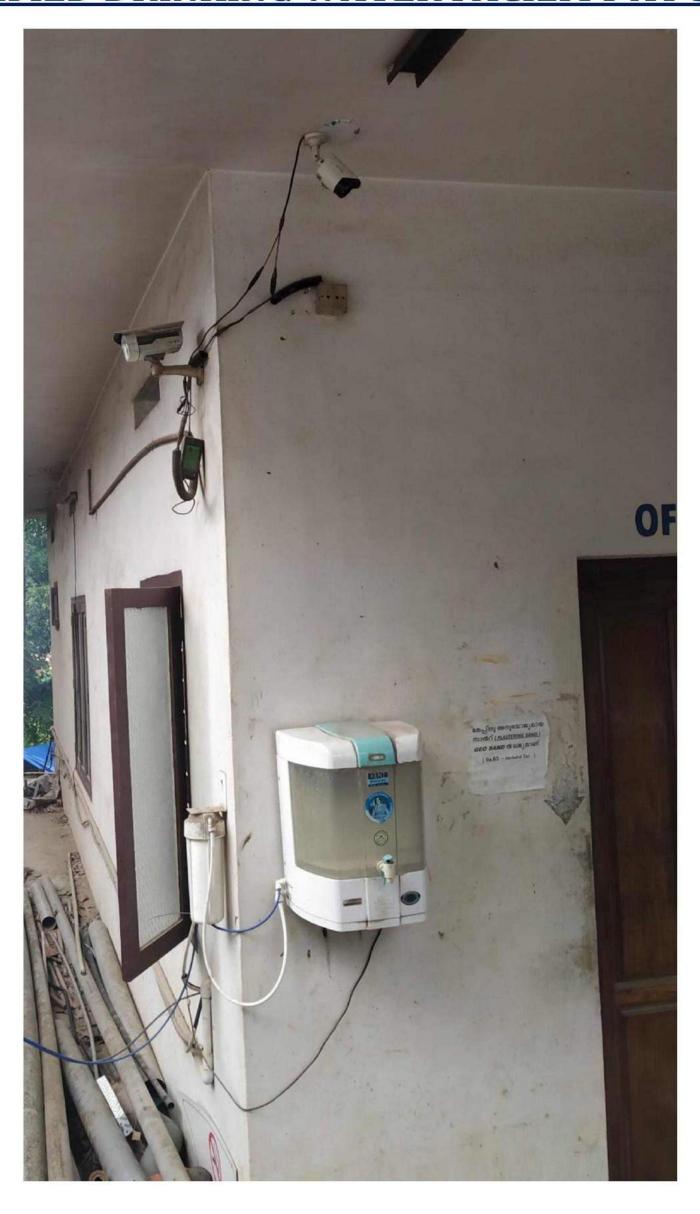


#### Annuxure-


		THE RESERVE OF THE PARTY OF THE	Ailituxui			
		CSR				
	C G George , Kolavallur village					
date		Discription	Amount			
26.4.2019	medical aid	KURUNGAT ANOOP CHIKITHSA SAHAYAM	5000			
4.4.2019	construction aid	ST.MAXMILLIAN KOLBE CHURCH	175000			
5.10.2019	Green belt	FOREST DEPARTMENT	8000			
28.8.2019		DESHEEYA NEETHI VEDHI	3000			
19.10.2019	medical aid	K V MANOJ CHIKILA SAHAYAM	3000			
4.5.2019	House aid	P. Chandran, Palmi House, 27TH Mile, Poolakutty	50000			

List of CSR Annexure

#### **CSR Activities**

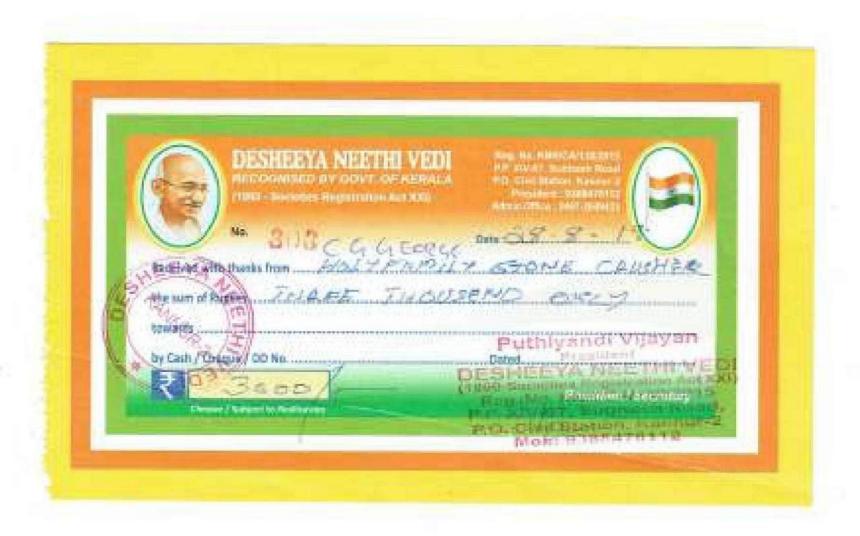



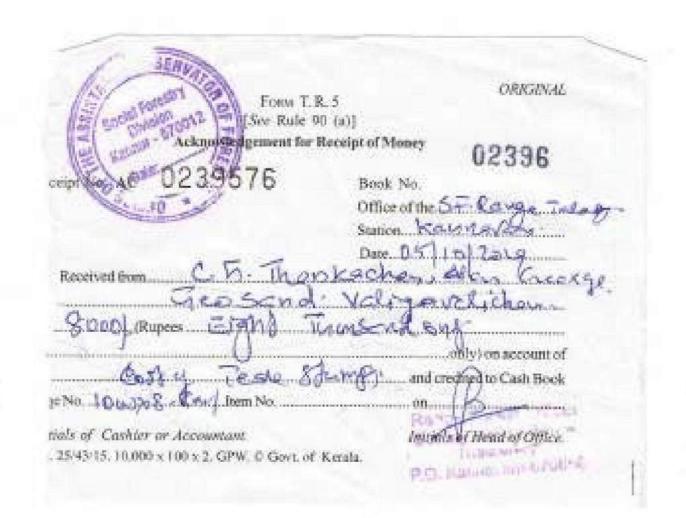























e-mail: gems hpt@yahoo.com, gemslab.hpt@gmail.com, Website: www.globalmining.in

GEMS-LD/TF/11/01 Date: 31.07.2019

#### **Analysis Report of Ambient Air Quality Monitoring**

Granite Building Stone Quarry of

Sri. C.G. George,

Extent: 4.0 Ha. (9.884 Acres) Name of the Customer/Address

Sy. Nos. 86/2, 87, 88/2, 88/3, 88/1, 89/2B, 147/2, 139/1,

Kolavallur Village, Thalassery Taluk,

Kannur District, Kerala State

Sample Description : Ambient Air Quality Monitoring

3 Sample Collected By GLOBAL Environment & Mining Services

Particulars of Sample Collected : Combined Sampler (GTI-241) 4

5 Duration of the Monitoring : 24 Hour of Sampling 6 Name of the Station : Core zone area (A1)

27.07.2019 7 Sample Received 8 Date of Analysis : 29.07.2019 Date of Analysis Completion 9 : 31.07.2019

Sample Code : GEMS/GBSQPGPL/AAQM/2019-20/1684

11 Report Number ULR-TC53231900000571F

#### Results

Date of	PM10 [μg/m³]	PM2.5 [μg/m³]	SO <sub>2</sub> [μg/m <sup>3</sup> ]	NO <sub>2</sub> [μg/m <sup>3</sup> ]
Monitoring	IS : 5182: (Part 23) 2006 (RA 2012)	USEPA 2001	IS: 5182: (Part 2) 2001 (RF 2014)	IS : 5182: (Part 6) 2006 (RF 2014)
27.07.2019	44.5	23.6	13.8	12.5
Standard	100	60	80	80

As per CPCB Standards, **INFERENCE** 

Report Status: - Measured Values for the above parameters are within the limit.

\*\*End of Report\*\*

Analysed By J.M. Thippeswamy Chemist



#### Note:


The result listed refers only to the tested samples & applicable parameters. Endorsement of products is neither inferred nor implied

Water Samples will be destroyed after 15Days, Minerals 3 Months, Filter papers & Thimbles 7 Days and ILC samples from the date of issue of Month test certificate unless otherwise

This report is not to be reproduced wholly or in part & cannot be used as evidence in the Court of law & should not use any advertising media without special permission in writing

Total liability of our laboratory is limited to the Invoice amount. Any dispute arising out of this report is subject to Hosapete jurisdiction only.















e-mail: gems hpt@yahoo.com, gemslab.hpt@gmail.com,Website: www.globalmining.in

GEMS-LD/TF/11/01 Date: 31.07.2019

#### **Analysis Report of Ambient Air Quality Monitoring**

Granite Building Stone Quarry of

Sri. C.G. George,

Extent: 4.0 Ha. (9.884 Acres)

: Sy. Nos. 86/2, 87, 88/2, 88/3, 88/1, 89/2B, 147/2, 139/1,

Kolavallur Village, Thalassery Taluk,

Kannur District, Kerala State.

2 Sample Description : Ambient Air Quality Monitoring

3 Sample Collected By : GLOBAL Environment & Mining Services

4 Particulars of Sample Collected : Combined Sampler (GTI-241)

5 Duration of the Monitoring : 24 Hour of Sampling

6 Name of the Station : Kolavallur (A2)

7 Sample Received : 27.07.2019 8 Date of Analysis : 29.07.2019 9 Date of Analysis Completion : 31.07.2019

Name of the Customer/Address

10 Sample Code : GEMS/ GBSQPGPL/AAQM/2019-20/1685

11 Report Number : ULR-TC53231900000572F

#### Results

Date of	PM10 [μg/m³]	PM2.5 [μg/m <sup>3</sup> ]	SO <sub>2</sub> [μg/m <sup>3</sup> ]	NO <sub>2</sub> [μg/m <sup>3</sup> ]
Monitoring	IS: 5182: (Part 23) 2006 (RA 2012)	USEPA 2001	IS: 5182: (Part 2) 2001 (RF 2014)	IS: 5182: (Part 6) 2006 (RF 2014)
27.07.2019	40	22.5	11:4	11.2
Standard	100	60	80	80

INFERENCE As per CPCB Standards,

Report Status: - Measured Values for the above parameters are within the limit.

\*\*End of Report\*\*

Analysed By J.M. Thippeswamy Chemist



#### Note:

The result listed refers only to the tested samples & applicable parameters. Endorsement of products is neither inferred nor implied.

Water Samples will be destroyed after 15Days, Minerals 3 Months, Filter papers & Thimbles 7 Days and ILC samples from the date of issue of Month test certificate unless otherwise specified.

This report is not to be reproduced wholly or in part & cannot be used as evidence in the Court of law & should not use any advertising media without special permission in writing.
 Total liability of our laboratory is limited to the Invoice amount. Any dispute arising out of this report is subject to Hosapete jurisdiction only.





### GLOBAL Environment & Mining Services

(Analytical Laboratory, Consulting Engineers, Mine designers, Geologist & Surveyors) 3 rd Main Road, Basaveswara Badavane, HOSAPETE – 583201, Dist.., Bellary (Karnataka).Ph: +91-8394 651111, 229433

e-mail: gems hpt@yahoo.com, gemslab.hpt@gmail.com,Website: www.globalmining.in





Certificate No: TC-5323

GEMS-LD/TF/08/01 Date: 27.07.2019

#### TEST REPORT OF AMBIENT NOISE LEVEL MONITORING

Granite Building Stone Quarry of

Sri. C.G. George,

Extent: 4.0 Ha. (9.884 Acres)

. Sy. Nos. 86/2, 87, 88/2, 88/3, 88/1, 89/2B, 147/2, 139/1,

Kolavallur Village, Thalassery Taluk,

Kannur District, Kerala State.

2 Sample Description

Sample Collected By

4 Particulars of Sample Collected

Name of the Customer/Address

5 Duration of the Monitoring

6 Date of Sample Receipt

7 Date if Analysis Completion

8 Sample Code

3

9 Report Number

: Ambient Noise Level Monitoring

: GLOBAL Environment & Mining Services

: Digital LCD Sound Level Meter (E0-6080-W8NI)

24 Hour of Sampling

27.07.2019

31.07.2019

: GEMS/GBSQPGPL/ANLM/2019-20/1686 & 1687

: ULR-TC53231900000573F

Date	27.07.2019	31.07.2019
Name of the Location	Core Zone	Kolavallur
Time (hrs)	N1	N2
6.00	43.4	40.4
7.00	47.0	44.6
8.00	49.2	44.4
9.00	51.2	48.2
10.00	53.4	46.6
11.00	55.4	44.2
12.00	55.8	44.6
13.00	55.6	44.2
14.00	55.8	46.4
15.00	55.6	48.2
16.00	56.4 .	52.8
17.00	55.2	50.4
18.00	51.6	48.8
19.00	48.8	48.2
20.00	44.2	44.4
21.00	42.6	42.4
22.00	42.0	40.6
23.00	38.6	38.4
00.00	36.0	38.2
01.00	36.4	35.8
02.00	36.0	35.8
03.00	36.2	35.4
04.00	36.2	35.8
05.00	36.4	35.2
Lmax	56.4	52.8
Lmin	36.0	35.2
Ld	53.494	47.482
Ln	38.674	38.28
Leq	52.2	47.8

#### Note:

- The result listed refers only to the tested samples & applicable parameters. Endorsement of products is neither inferred nor implied.
- Water Samples will be destroyed after 15Days. Minerals 3 Months, Filter papers & Thimbles 7 Days and ILC samples from the date of issue of Month test certificate unless otherwise specified.
- 3. This report is not to be reproduced wholly or in part & cannot be used as evidence in the Court of law & should not use any advertising media without special permission in writing.

Total liability of our laboratory is limited to the Invoice amount. Any dispute arising out of this report is subject to Hosapete jurisdiction only.

#### NOISE: (AMBIENT STANDARDS)

	Andrew II In plant	Limit in dB(A) Leq		
Area Code	Category of Area	Day Time	Night Time	
A	Industrial Area	75	70	
В	Commercial Area	65	55	
C	Residential Area	55	45	
D	Silence Area	50	40	

Note	Day time shall mean from 6:00 am and 10.00 pm
	Night time shall mean from in between 10.00 pm and 5.00 am
	Silence zone is an area comprising not less than 100 meters around hospitals, educational institutions, courts, religious places or any other area which is declared as such by the competent authority
	Mixed categories of areas may be declared as one of the four above mentioned categories by the competent authority
	*dB(A) Leq denotes the time weighted average of the level of sound in decibels on scale A which relatable to human being
	A "decibel" is a unit in which noise is measured
	"A", in dB(A) Leq, denotes the frequency weighting in the measurement of noise and corresponds to frequency response characteristics of the human ear.



#### Note:

- The result listed refers only to the tested samples & applicable parameters. Endorsement of products is neither inferred nor implied.

  Water Samples will be destroyed after 15Days, Minerals 3 Months, Filter papers & Thimbles 7 Days and ILC samples from the date of issue of Month test certificate unless otherwise specified.
- This report is not to be reproduced wholly or in part & cannot be used as evidence in the Court of law & should not use any advertising media without special permission in writing. Total liability of our laboratory is limited to the Invoice amount. Any dispute arising out of this report is subject to Hosapete jurisdiction only.



### GLOBAL Environment & Mining Services

(Analytical Laboratory, Consulting Engineers, Mine designers, Geologist & Surveyors) 3 rd Main Road, Basaveswara Badavane, HOSAPETE - 583201, Dist.., Bellary (Karnataka). Ph: +91-8394 651111, 229433



Standards as per

IS: 10500: 2012





2

Name of the Customer/Address

Sample Collected By

e-mail: gems hpt@yahoo.com, gemslab.hpt@gmail.com, Website: www.globalmining.in

Certificate No: TC-5323

GEMS-LD/TF/23/01 Date: 31.07.2019

#### **Analysis Report of Drinking Water**

Granite Building Stone Quarry of

Sri. C.G. George,

Extent: 4.0 Ha. (9.884 Acres)

Sy. Nos. 86/2, 87, 88/2, 88/3, 88/1, 89/2B, 147/2, 139/1,

Kolavallur Village, Thalassery Taluk,

Kannur District, Kerala State

GLOBAL Environment & Mining Services

Well Water

3 Sample type 4 Name of the location Buffer area (WW1) 5 Date of Sample Collection 27.07.2019 Date of Sample Received 29.07.2019 6 Date of Sample Analyzed 31.07.2019 10 Sample Code GEMS/GBSQPGPL/WW/2019-20/1688 **ULR Number** ULR-TC53231900000574F SI. **Parameters** Protocol

N. I minimeters		Protocol	Unit Resu	Results	10.10000.12012	
No.		1100001	Cint	Results	Desirable Limits	Permissible Limits
1.	pH	APHA 22 <sup>nd</sup> Edition 2012 4500 B (Pg No. 4-92 to 4-96)	-	7.60	6.5 to 8.5	No Relaxation
2.	Conductivity	APHA 22 <sup>nd</sup> Edition 2012 2510 B (Pg No. 2-54)	μS/cm	142	-	
3.	Turbidity (NTU)	APHA 22 <sup>nd</sup> Edition 2012 2130 B (Pg No. 2-14)	NTU	0.18	1	5
4,	Total Dissolved Solids	APHA 22 <sup>nd</sup> Edition 2012 2540 B (Pg No. 2-65)	mg/L	146	500	2000
5.	Calcium as Ca	APHA 22 <sup>nd</sup> Edition 2012 3500 Ca B (Pg No. 3-84)	mg/L	18	75	200
6.	Magnesium as Mg	APHA 22 <sup>nd</sup> Edition 2012 3500 B-Mg By Calculation	mg/L	5.20	30	100
7.	Total Suspended Solids	APHA 22 <sup>nd</sup> Edition 2012 2540 B (Pg,No. 2-66 to 2-67)	mg/L	1.22		
8.	Dissolved Oxygen	IS:3025 (part 38)- 1989, ,RA – 2014 Winkler titrimetric azide modification	mg/L	7.40		·
9.	BOD 3 days at 27° C	IS:3025 (part 44) - 1993 , RA-2014,	mg/L	NIL		
10.	COD as O2	APHA 22 <sup>sd</sup> Edition 2012 2540 B (Pg No. 5-19 to 5-20)	mg/L	NIL	•	• .
11.	Dissolved Phosphate as P	IS:3025 (part 38)- 1988, RA – 2014, Stannous chloride method	mg/L	<0.01		
12.	Sodium as Na	APHA 22 <sup>nd</sup> Edition 2012 Na 3500 B (Pg No. 3-97 to 3-98)	mg/L	8.6		-
13.	Potassium as K	APHA 22 <sup>nd</sup> Edition 2012 3500 B (Pg No. 3-87 to 3-88)	mg/L	0.56	-	-
14.	Total Hardness as CaCO3	APHA 22 <sup>nd</sup> Edition 2012 2340 C (Pg No. 2-46)	mg/L	116	200	600
15.	Chloride as Cl	APHA 22 <sup>nd</sup> Edition 2012 4500 CI (Pg No. 4-72)	mg/L	14.0	250	1000
16.	Total Iron as Fe	APHA 3500 B(Pg No. 3-77)	mg/L	0.18	0.30	No Relaxation
17.	Sulphate as SO4	APHA 22 <sup>nd</sup> Edition 2012 4500 SO42 – E (Pg No. 4-190)	mg/L	98	200	400
18.	Fluoride as F	APHA 22 <sup>nd</sup> Edition 2012 4500 F-D (Pg No. 4-87 to 4-88)	mg/L	0.20	1	1.50
19.	Nitrate Nitrogen as NO3	APHA 22 <sup>nd</sup> Edition 2012 4500 NO3 E (Pg No. 4-125 to 4-127)	mg/L	12	45	No relaxation
20.	Total Alkalinity as	APHA 22 <sup>nd</sup> Edition 2320 B	mg/L	36	200	600

#### Note:

- The result listed refers only to the tested samples & applicable parameters. Endorsement of products is neither inferred nor implied.
- Water Samples will be destroyed after 15Days, Minerals 3 Months, Filter papers & Thimbles 7 Days and ILC samples from the date of issue of Month test certificate unless otherwise
- This report is not to be reproduced wholly or in part & cannot be used as evidence in the Court of law & should not use any advertising media without special permission in writing.

Total liability of our laboratory is limited to the Invoice amount. Any dispute arising out of this report is subject to Hosapete jurisdiction only.

	CaCO3	(Pg No. 2-35)				
21.	Oil & Grease	APHA 22 <sup>nd</sup> Edition 2012 5520 B (Pg No.5-40 to 5-41)	mg/L	NIL	mentioned 154 FACA	*
22.	Total Coliform count*	APHA 22 <sup>nd</sup> Edition 2012 9222 B (Pg No.9-66) Membrane filter technique	MPN/ 100ml	Absent	Shall not be detectable in any 100 ml sample	
23.	Escherichia coli count*	APHA 22 <sup>nd</sup> Edition 2012 9222 B (Pg No.9-66) Membrane filter technique	E.Coli/ 100ml	Absent	Shall not be detectable in any 100 ml sample	-

\*\*End of report\*\*

Analysed By Keerthana Yadav B.R

Chemist

Authorized Signatory
K. Ramakrishna Reddy
Technical Manager

Note:

The result listed refers only to the tested samples & applicable parameters. Endorsement of products is neither inferred nor implied.

Water Samples will be destroyed after 15Days, Minerals 3 Months, Filter papers & Thimbles 7 Days and ILC samples from the date of issue of Month test certificate unless otherwise specified.

This report is not to be reproduced wholly or in part & cannot be used as evidence in the Court of law & should not use any advertising media without special permission in writing.
 Total liability of our laboratory is limited to the Invoice amount. Any dispute arising out of this report is subject to Hosapete jurisdiction only.



भारत सरकार | Government of India

वाणिज्य और उद्योग मंत्रालय | Ministry of Commerce & Industry

पेट्रोलियम तथा विस्फोटक सुरक्षा संगठन (पेसो) | Petroleum & Explosives Safety Organisation (PESO)

पूर्व नाम- विस्फोटक विभाग | Formerly- Department of Explosives केन्द्रीय भवन, ब्लाक सी-2, तीसरी मंजिल | Kendriya Bhavan, Block C-2, 3rd Floor

CSEZ पी.ओ.कक्कानाङ् कोच्ची | CSEZ PO Kakkanad Dist. Ernakulam Ernakulam 682037

फोन (Phone):- 2427286 | फैक्स (Fax):- 2427276 ई-मेल Email: dycceernakulam@explosives.gov.in

संख्या (No.): E/SC/KL/22/746(E32353)

दिनांक (Date): 07/02/2019

नेवा में | To,

Shri C.G.George,

Chittath House, Kuthuparamba post, Town/Village - Kuthuparambu

District-KANNUR, State-Kerala, Pincode - 670643

E 8 FER 2019

विषय :

Survey No(s).88/1, ग्राम Kolavallur, Thalassery Tk., जिला KANNUR, राज्य Kerala में विस्फोटक के मैगजीन में उपयोग के लिए कब्जा हेतु विस्फोटक नियम, 2008 के अंतर्गत LE-3 में जारी अनुजिस सं E/SC/KL/22/746(E32353) के नवीनीकरण संदर्भ में।

Subject:

Possession for Use of Explosives from magazine situated at Survey No(s).:88/1, Kolavallur, Thalassery Tk., Dist. KANNUR, Kerala - Licence No.: E/SC/KL/22/746(E32353) granted in Form LE-3 of Explosives Rules, 2008 - Renewal regarding

महोदय | Sir,

आपका उपर्युक्त विषय पर पत्र संख्या Nil दिनांक 30/01/2019 का संदर्भ ग्रहण करें। विस्फोटक नियम, 2008 के अंतर्गत प्ररूप LE-3 में जारी अनुजप्ति दिनांक

81/3/2024 तक नवीनीकृत कर इस पत्र के साथ भेजी जा रही है। Reference to your letter No.: Nil dated: 30/01/2019, the subject licence duly renewed upto **31/3/2024** and issued in Form LE-3 of Explosives Rules, 2008 is

forwarded herewith.

अनुज्ञप्ति के आगामी नवीकरण हेतु कृपया निम्नलिखित दस्तावेज दिनांक 31/03/2024 से पहले इस कार्यालय को भेजे जाएं. For further renewal of licence, please submit the following documents so as to reach this office on or before 31/3/2024.

प्ररूप आरई-1 में विधिवत पूर्ण एवं हस्ताक्षरित आवेदन।
 Application in Form RE-1 duly filled in and signed.

• एक से पाँच वर्ष के अनुज्ञिस शुल्क का बैंक ड्राफ्ट। बैंक ड्राफ्ट किसी भी राष्ट्रीयकृत बैंक के नाम आहरित, संयुक्त मुख्य विस्फोटक नियंत्रक, चेन्नई के पक्ष में चेन्नई में देय हों।

Licence fees for one to five years in the form of demand draft drawn on any Nationalized Bank in favour of Jt. Chief Controller of Explosives, Chennai payable at Chennai.

अनुमोदित प्लान के साथ मूल अनुजित।
 Original licence with approved plan.

• कृपया इस संबंध में विस्फोटक नियम, 2008 के नियम 112 का भी संदर्भ ग्रहण करें।

In this connection, please also refer to Rule 112 of Explosives Rules, 2008.

विस्फोटकों के क्रय हेतु आरई-11 में मांगपत्र (इंडेंट) आपूर्तिकर्ता को दिया जाए और उसी की एक प्रति इस कार्यालय को भेजी जाएं (आतिशबाजी गोदाम के लिए लागू नहीं )।
 Indent for purchase of explosives shall be placed in RE-11 with the supplier and copy of the same shall be sent to this office. (Not applicable for

fireworks store house)

• कृपया विस्फोटकों की त्रैमासीक विवरणी हर तिमाही के अंत में आरई-7 में प्रस्तुत की जाएं । विवरणी इस कार्यालय के कार्यालय में आगामी तिमाही के 10 तारीख से पहले पहुंच जानी चाहिए (आतिशबाजी गोदाम के लिए लागू नहीं )। Please submit quarterly returns of explosives in RE-7 at the end of every quarter so as to reach this office by 10th of the succeeding quarter.(Not applicable for fireworks store house)

• सभी ब्लास्टिंग आपरेशन एक सक्षम द्वारा की जाएगी जो उपरोक्त नियमों के तहत एक वैध शॉट फायर प्रमाणपत्र धारक हो। हालांकि, खान अधिनियम 1952 के अधीन आने वाले खानों में ब्लास्टिंग आपरेशन करने वाले ब्लास्टर की योग्यता उसी अधिनियम से निर्धारित हो।

All blasting operations shall be carried out by a competent person holding a valid shot firer's permit granted under above rules. However, blasting operations in mines coming under the purview of the Mines Act 1952, the blaster shall have qualifications prescribed in the regulations framed under the said Act.

आपके खाते में रुपए 1840/- की राशि शेष हैं जो इस संदर्भ को उद्धृत करते हुए भविष्य के संव्यवहार में समायोजित की जा सकती है । An amount of **Rs. 1840**/- balance is in your credit, which may be utilized for future transaction by quoting this reference.

भवदीय | Your's faithfully

(आर.वेण्गोपाल | Dr. R.Venugopal)

उप मुख्य विस्फोटक नियंत्रक | Deputy Chief Controller of Explosives

कोच्ची | Emakulany विस्फोटक नियंत्रक

Deputy Chief Controller of Explosives

प्रतिलिपि प्रेषित | Copy Forwarded to:
1. ज़िला मजिस्ट्रेट (District Magistrate), KANNUR (Kerala)- सूचना के लिए (for information.) एरणाकुलम Ernakulam

उप मुख्य विस्फोटक नियंत्रक | Deputy Chief Controller of Explosives

कोच्ची | Ernakulam

(अधिक जानकारी जैसे आवेदन की स्थिति, शुल्क आदि के लिए हमारी वेबसाइट http://peso.gov.in देखें.) (For more information regarding status, fees and other details please visit our website http://peso.gov.in) अनुजित प्ररूप एल. ई.-3 | LICENCE FORM LE-3 **Annexure-7** 

(विस्फोटक नियम, 2008 की अनुसूची 4 के भाग 1 के अनुच्छेद 3(क) से (घ) देखिए।) (See article 3(a) to (d) of Part 1 of Schedule IV of Explosives Rules, 2008)

(ग) उपयोग के लिए एक समय पर वर्ग 1,2,3,4,5 या वर्ग 7 के विस्फोटक या किसी मैगजीन में वर्ग 6 के विस्फोटक रखने के लिए अन्जिप्ति

Licence to possess: (c) for use, explosives of class 1, 2,3,4,5,6 or 7 in a magazine

अनुजित सं. (Licence No.) : E/SC/KL/22/746(E32353) वार्षिक फीस रुपए (Annual Fee Rs): 2400/-

1. Licence is hereby granted to

Shri C.G.George (अधिभोगी / Occupier : C G George), Chittath House, Kuthuparamba post, Town/Village -Kuthuparambu, District-KANNUR, State-Kerala, Pincode - 670643

को अनुज्ञित अनुदत्त की जाती है।

2. अनुजिसधारी की प्रास्थिति | Status of licensee : Individual

3. अनुज्ञप्ति निम्नलिखित प्रयोजनों के लिए विधिमान्य है। Licence is valid only for the following purpose.

possess for use of Nitrate Mixture, Safety Fuse, Electric Detonators, Ordinary Detonator, - के उपयोग के लिए

4. अनुज्ञप्ति विस्फोटकों के निम्नलिखित किस्मों, प्रकार और मात्रा के लिए विधिमान्य है। Licence is valid for the following kinds and quantity of explosives: -- (क) (a)

京 r. No.	नाम और विवरण Name and Description	वर्ग और प्रभाग Class & Division	उप-प्रभाग Sub-division	मात्रा किसी एक समय में Quantity at any one time
1.	Nitrate Mixture	2,0	0	150 Kg.
2.	Safety Fuse	6,1	0	2000 Mtrs
3.	Electric Detonators	6,3	0	2500 Nos.
4.	Ordinary Detonator	6,3	0	5000 Nos.

(ख) किसी एक कलैंडर मास में खरीदे जाने वाले विस्फोटक की मात्रा [अनुच्छेद 3(ख) और (ग) के अधीन अनुज्ञित के लिए। 26 times as above.

(b) Quantity of explosives to be purchased in a calendar month[applicable for licence under article 3(b) and (c)]:

5. निम्निलिखित रेखाचित्र (रेखाचित्रों) से अनुज्ञप्त परिसर की पुष्टि होती है। ्रेखाचित्र क्र. (Drawing No.) E/SC/KL/22/746(E32353) The licensed premises shall conform to the following drawing(s): . दिनांक (Dated) 16/12/2005

6. अनुजिस परिसर निम्नलिखित पते पर स्थित हैं। The licensed premises are situated at following address:

Survey No(s). 88/1, ग्राम (Town/Village) : Kolavallur, Thalassery Tk.

पुलिस थाना (Police Station): Kolavallur

जिला (District) KANNUR राज्य (State) दूरभाष (Phone)

पिनकोड (Pincode) Kerala ई. मेल (E-Mail) फैक्स (Fax)

<sup>7.</sup> अनुज्ञप्ति परिसर में निम्नलिखित सुविधाएं अंतर्विष्ट हैं। : One Mini Explosives Magazine & Detonator Room The licensed premises consist of following facilities.

8. अनुजित समय – समय पर यथासंशोधित विस्फोटक अधिनियम, 1884 और उनके अधीन विरचित विस्फोटक नियम, 2004 के उपबंधो, शर्तों और अतिरिक्त शर्तों और निम्नलिखित उपाबध्दों के अधीन रहते हुए अनुदत्त की जाती है। The licence is granted subject to the provision of Explosives Act 1884 as amended from time to time and the Explosives Rules,

2008 framed there under and the conditions, additional conditions and the following Annexures.

 उपर्युक्त क्रम सं. 5 में यथा कथित रेखाचित्र (स्थान, सिन्निर्माण संबंधी और अन्य विवरण दर्शित करते हुए)। Drawings (showing site, constructional and other details) as stated in serial No. 5 above.

2. अनुज्ञप्ति प्राधिकारी व्दाररा हस्ता.क्षरित इस अनुज्ञप्ति की शर्ते और अतिरिक्ति शर्ते। Conditions and Additional Conditions of this licence signed by the licensing authority.

3. दूरी प्ररूप DE-2 | Distance Form DE-2.

9. यह अनुज्ञप्ति तारीख 31 मार्च 2007 तक विधिमान्य रहेगी। This licence shall remain valid till 31st day of March 2007.

यह अनुज्ञित, अधिनियम या उसके अधीन विरचित नियमों या अनुसूची V के भाग 4 के प्रति निर्दिष्ट सेट-VII के अधीन तथा उपवर्णित इस अनुज्ञित की शर्तों का अधिक्रमण करने या यदि अनुज्ञप्त परिसर योजना या उससे संलग्न उपबंध में दर्शित विवरण के अनुरूप नहीं पाए जाने पर निलंबित या प्रतिसंहत की जा सकती है, जहां वह लागू हो।

This licence is liable to be suspended or revoked for any violation of the Act or Rules framed there under or the conditions of this licence as set forth under Set VIII, wherever applicable, referred to in Part 4 of Schedule V or if the licensed premises are not

found conforming to the description shown in the plans and Annexure attached hereto.

Sd/-

तारीख | The Date - 16/12/2005

संयुक्त मुख्य विस्फोटक नियंत्रक | Joint Chief Controller of Explosives South Circle, Chennai

#### Amendments:

Amendment of Quantity of Explosives/Monthly Purchase Limit dated: 23/08/2012
 Amendment of Quantity of Explosives/Monthly Purchase Limit dated: 22/07/2014

Amendment of Quantity of Explosives/Monthly Purchase Limit dated: 13/01/2015

Amendment in Drawings/Facilities/Premises dated: 23/08/2016

Amendment of Quantity of Explosives/Monthly Purchase Limit dated: 22/12/2017

नवीनीकरण के पृष्ठांकन के लिए स्थान

Space for Endorsement of Renewal

नवीकरण की तारीख Date of Renewal	समाप्ति की तारीख Date of Expiry	अनुज्ञापन प्राधिकारी के हस्ताक्षर और स्टाम्प Signature of licensing authority and stamp	
07/02/2019	31/03/2024	Dy. Chief Controller of Explosives, Ernakulam	
		उप मुख्य विस्फोटक नियंत्रक Deputy Chief Controller of Explosives	
		एरणाक्लम Ernakulam	

कानूनी चेतावनी : विस्फोटकों को गलत ढंग से चलाने या उनका दुरूपयोग विधि के अधीन गंभीर दांडिक अपराध होगा। Statutory Warning : Mishandling and misuse of explosives shall constitute serious criminal offence under the law. मैगजीन में वर्ग 1,2,3,4,5,6, और 7 के विस्फोटकों को बिक्री या प्रयोग हेतु रखने के लिए प्ररूप एल.ई. 3 [अनुच्छेद 3 (ख) से (ग)] में मुख्य विस्फोटक नियंत्रक या विस्फोटक नियंत्रक व्दारा प्रदान किए जाने वाले अनुराप्ति सं. E/SC/KL/22/746(E32353) की शर्ते निम्नलिखित हैं। The following are the conditions of licence number E/SC/KL/22/746(E32353) to possess for sale or use, explosives of Class 1,2,3, 4, 5, 6 and 7 in a magazine in Form LE-3 (articles 3(b) to (c)) granted by Chief controller of Explosives or Controller of Explosives.

1. परिसर में किसी भी समय विस्फोटकों की मात्रा अनुज्ञापन योग्य सामर्थ्य से अधिक नहीं होगी ।

The quantity of explosives on the premises at any one time shall not exceed the licensable capacity.

2. विस्फोटकों के भंडारण के लिए प्रयुक्तर होने वाली मैगजीन अनुसूची III और अनुजिस के उपाबंध में विनिर्दिष्ट सुरक्षा दूरी बनाए रखना होगा।

The magazine used for storage of explosives shall maintain safety distance specified in Schedule III and annexure to the licence.

3. मैगजीन का प्रयोग उन सभी विस्फोटकों के, जो इस अनुज्ञित में विनिर्दिष्ट है, रखे जाने के लिए और ऐसे रखे जाने से संबध्द आधान या औजार या उपकरणों के रखे जाने के लिए ही किया जाएगा; अन्यथा नहीं । The magazine shall be used only for keeping all explosives specified in this licence and of receptacles for, or tools or implements for work connected with the keeping of such explosives.

पैकजों को खोलने का कार्य और विस्फोटकों को तौलने तथा पैक करने का कार्य मैगजीन में नहीं किया जाएगा ।
 The opening of packages and the weighing and packing of explosives shall not be carried on in the magazine.

5. दो या दो से अधिक वर्णन के विस्फोटकों को, जिन्हें मैगजीन में रखे जाने की अनुना दी जा सकती है, मैगजीन में तभी रखे जाएंगे जब उनमें से प्रत्येक को, ऐसे पदार्थ या स्वरूप का कोई मध्यवर्ती विभाजक लगाकर या उनके बीच ऐसा मध्यवर्ती स्थान छोड़कर, परस्पर पृथक कर दिया जाए कि किसी वजह से विस्फोटक में लगने वाली आग या होने वाला विस्फोट किसी अन्य वर्णन के विस्फोटक तक न पहुंच सके : परंत -

(घ) 2 (नाइट्रेट मिश्रण), वर्ग 3 (नाइट्रो योगिक) के विभिन्न विस्फोटक, वर्ग 6 प्रथम प्रभाग के अंतर्गत आने वाले सुरक्षा पलीते और वर्ग 6 प्रभाग 2 के अंतर्गत आनेवाले विस्फोटक प्रेरक पलीते, जिनमें कोई खुला लोहा या इस्पात नहीं है, एक दूसरे के साथ बिना किसी मध्यवर्ती विभाजक या स्थायन के रखे जा सकते हैं।

(इ) वर्ग 6 प्रभाग 3 के अंतर्गत आनेवाले विस्फोटक प्रेरक अलग रखे जाएंगे ।

(च) वर्ग 1 के अंतर्गत आने वाले बारूद को अलग रखा जाएगा ।

Two or more description or explosives which may be permitted to be kept in the magazine shall be kept only if they are separated from each other by an intervening partition of such substance or character, or by such intervening space, as will effectually prevent explosion or fire in the one communicating with the other; Provided that—

(d) the various explosives of Class 2 (nitrate-mixture), Class 3 (nitro-compound), safety fuses belonging to Class 6 Division 1 and detonating fuses belonging to Class 6 Division 2 as do not contain any exposed iron or steel, may be kept with each other without any intervening partition or space;

(e) Detonators belonging to Class 6 Division 3 shall be kept separately.

(f) Gun powder belonging to Class 1 shall be kept separately.

6. वर्ग 3 (नाइट्रो योगिक) के विस्फोटकों को, उनके विनिर्माण की तारीख से एक वर्ष बीत जाने के पश्चात सिवाय अनुजापन प्राधिकारी की विशेष मंजूरी के मैगजीन में नहीं रखा जाएगा । Explosives of Class 3 (nitro compound) shall not be kept in the magazine after the expiration of one year from the date of their

manufacture except with the special sanction of licensing authority.

7. वर्ग 3 (नाइट्रो योगिक) के विस्फोटकों को, उनके विनिर्माण की तारीख से एक वर्ष बीत जाने के पश्चात मैगजीन में तभी रखा जाएगा जब कि किसी विस्फोटक नियंत्रक ने इसके लिए विशेष मंजूरी दे दी हो ।

(i) जब ऐसी मंजूरी दे दी गई हो तो प्रत्येक निरीक्षण पर किसी विस्फोटक नियंत्रक से ऐसा लिखित प्रमाणपत्र अभिप्राप्त कर लिया जाए जिसमें दी गई मंजूरी के अंतर्गत आनेवाली अविध दर्शित की गई हो और ऐसे प्रमाणपत्र के अनुजिसिधारी अपने पास रखेगा और मांग की जाने पर प्रस्तुरत करेगा ।

(ii) जब कोई विस्फोटक मानक शुध्दता का न रह जाने के कारण या द्रवणीकरण या नाइट्रो ग्लीअसरीन या द्रव नाइट्रो योगिक के निकल जाने के चिन्ह प्रकट होने के कारण मैगजीन में भण्डारित किए जाने के उपयुक्त नहीं रह जाता है तो अनुज्ञिसधारी अपने ही व्यय पर ऐसे विस्फोटक के निपटारे के लिए ऐसे निदेशों का अनुपालन करेगा जो मुख्य नियंत्रक या विस्फोटक नियंत्रक जारी करें।

Explosives of Class 3 (nitro compound) shall not be kept in the magazine after the expiration of one year from the date of their manufacture except with the special sanction of the Controller of Explosives.

(i) When such sanction has been given, a written certificate showing the period covered by the sanction shall be obtained from the Controller of Explosives at each inspection, and shall be kept by the licensee and produced on demand.

(ii) When an explosive owing to its being no longer of standard purity or owing to signs of liquefaction or of exuded nitro-glycerin or liquid nit

8. मैगजीन के भीतरी भाग या उसमें लगी बैंचो, शेल्फों और उसकी फिटिंग का इस प्रकार सिन्नर्माण किया जाएगा या उन्हें इस प्रकार अंतरित या अवतरित किया जाएगा कि विस्फोटक का किसी लोहे या इस्पात के साथ संपर्क रोका जा सके । भीतरी भाग में लगी बेंचे, शैल्फें और फिटिंग यथासाध्य ग्रिट से मुक्त एवं साफ रखे जाएंगे तथा ऐसे विस्फोटक, जो जल से खतरनाक रूप में प्रभावित हो सकते हैं, इस बाबत सम्यक सावधानी बरती जाएगी कि वहां कोई जल मौजूद न रहे : परंतु किसी लोहे या इस्पात के खुले होने के विरूप्त सावधानी से संबंधित इस शर्त का यह भाग ऐसे किसी भवन में बाध्येकर नहीं होगा जिसमें वर्ग 6 (गोला बारूद) के प्रथम के विस्फोटक से भिन्न कोई विस्फोटक रखा गया है ।

The interior of the magazine and the benches, shelves and fittings therein shall be so constructed or so lined or covered as to prevent the exposure of any iron or steel contact with the explosives. Such interior, benches, shelves and fittings shall so far as is reasonably

उप मुख्य विस्फोटक नियंत्रक Deputy Chief Controller of Explosives एरणाकुलम Ernakulam

practicable, be kept free from grit and shall otherwise be clean; and in the case of any explosives liable to be dangerously affected by water, due precautions shall be taken to exclude water there from;

Provided that so much of this condition as relates to precautions against the exposure of any iron or steel shall not be obligatory in a building in which no explosive other than explosive of the 1st Division 6th (Ammunition) Class is kept.

यदि तडित चालक का परीक्षण विस्फोटक नियंत्रक करता है तो अनुजाििधारी ऐसे परीक्षण के लिए विहित फीस का संदाय करेगा यदि परीक्षण असमाधानकारी साबित होता है तो उतनी ही फीस अनुजिसधारी व्दारा पश्चात्वर्ती प्रत्येक परीक्षण के लिए तब तक दी जाती रहेगी जब तक कि परीक्षण अधिकारी तिडत चालक को समाधानप्रद घोषित नहीं कर देता :

परंतु किसी एक परीक्षण के लिए देय फीस किसी एक दिन के दौरान किसी चालक के किए गए सभी परीक्षणों के लिए प्रभार्य होगा :

परंतु यह और कि यदि दो या अधिक तडित चालक एक ही मैगजीन से संबध्द हैं तो ऐसे सभी चालकों के परीक्षण के लिए फीस ऐसी किसी फीस से अधिक नहीं होगी जो किसी एक तडित चालक के परीक्षण के लिए हर स्थिति में विहित की गई है।

If the lighting conductor is tested by the Controller of Explosives, the licensee shall pay the fees prescribed for test. In the even of the test proving unsatisfactory, the same fees shall be payable by the licensee for each subsequent test until the lighting conductor is passed by the testing officer as satisfactory:

Provided that the fees payable for a single test shall be charged for all tests made on a conductor during any one day:

Provided further that where two or more lighting conductors are attached to one and the same magazine, the fee for the testing of all such conductors shall not exceed the fee prescribed in this condition for testing a single lighting conductor.

10. उपयुक्त तथा जेब रहित कार्यकरण वस्त्रों , उपयुक्त जूतों के प्रयोग व्दारा तथा तलाशी लेकर या अन्यथा अथवा ऐसे किन्हीं साधनों व्दारा इस बाबत सम्यक उपबंध किया जाएगा कि फैक्ट्री परिसर में अग्नि, दियासलाई अथवा ऐसी कोई वस्तुोएं या पदार्थ, जिससे विस्फोट हो सकता है या आग लग सकती हो, किन्तु इस शर्त के कारण ऐसी संरचना, स्थिति या स्वरूप में किसी कृत्रिम बती का प्रवेश वर्जित नहीं है जिससे आग लगने या विस्फोट होने का खतरा न हो :

परंतु इस शर्त का वह भाग, जो लोहे या इस्पात के अपवर्जन को लागू होता है, ऐसे किसी भवन के संबंध में बाध्य कर नहीं होगा जिससे भिन्न कोई विस्फोटक नहीं रखा गया है।

Due provisions shall be made, by the use of suitable working clothes without pockets, suitable shoes and by searching or otherwise or by such means, for preventing the introduction into danger area of the factory premises of fie, Lucifer matches or any substance or article likely to cause explosion or fire, but this condition shall not prevent the introduction of an artificial light of such construction, position or character as not to cause any danger of fire or explosion:

Provided that so much of this condition as applies to the exclusion of iron or steel, shall not be obligatory in a building in which no explosive other than an explosive of the 1st Division of the 6th (Ammunition) Class is kept.

अनुजितिधारी प्ररूप आर.ई.-3 और आर.ई.-4 या आर.ई.-5, जैसी स्थिति हो, में सभी विस्फोटकों का अभिलेख और लेखा रखेगा और विस्फोटक नियम, 2008 के अधीन प्राधिकृत किसी भी अधिकारी के समक्ष उसके व्दारा ऐसा करने की मांग की जाने पर स्टाक पुस्तक और अभिलेख प्रस्तुत करेगा । स्टाक पुस्तक विहित प्रोफार्मा में पृष्ठ संख्यांकित होगी ।

The licensee shall keep records and accounts of all explosives in Forms RE-3 and RE-4 or RE-5, as the case may be, and exhibit the stock books and records to any of the officers authorised under the Explosives Rules, 2008 whenever such officer may call upon him to do so.

The stock books in the prescribed proforma shall be page numbered.

12. परिसरों में कोई परिवर्तन या तबदीली अनुजापन प्राधिकारी के पूर्वानुमोदन बिना नहीं की जाएगी और अनुजिसधारी ऐसी किसी शर्त का अनुपालन करेगा जो इस निमित अनुज्ञापन प्राधिकारी विनिर्दिष्ट करें। No changes or alterations shall be carried out to the premises without prior approval of the licensing authority and the licensee shall comply with any condition that may be specified by the licensing authority in this behalf.

13. मैंगजीन सभी समयों पर अच्छी मरम्मत की स्थिति में बनाई रखी जाएगी (या अच्छी हालत में बनाई रखी जाएगी )। यदि किसी कारणवश किसी विस्फोटक के भण्डारण के लिए मैगजीन अनुपयुक्त हो जाती है तो अनुज्ञिसधारी इस बात की सूचना अनुजापन प्राधिकारी को त्रत देगा ।

Magazine shall at all times be kept in state of good repair (or maintained in good condition). The licensee shall report to licensing authority forthwith, if the magazine becomes unfit for storage of any explosives for any reason whatsoever.

मैंगजीन का अनुजिसिधारी इन नियमों के नियम 24 के उप-नियम 3 के अनुसार त्रैमासिक विवरणी प्रस्तुत करेगा ।

The licensee of the magazine shall submit quarterly return as per sub-rules (3) and (4) of rule 24 of these rules.

14. यदि सुरक्षा दूरी का कोई अधिक्रमण होता है तो उसकी सूचना अनुज्ञापन प्राधिकारी को आवश्यक सलाह और कार्यवाही के लिए तुरंत दी जाएगी ।

Any encroachment of the safety distance shall be immediately communicated to the licensing authority for necessary advice and action.

15. यदि कोई विस्फोटक विनष्ट हुआ अथवा अनुपयोगी जाया जाता है तो उसकी सूचना अनुजापन प्राधिकारी को, सलाह प्राप्त करने के लिए, त्रत दी जाएगी।

The licensing authority shall be immediately informed for advice if any explosive is found deteriorated or unserviceable.

16. विस्फोटकों के पैकेटों के चट्टे इस प्रकार लगाए जाएंगे कि कम से कम एक व्यक्ति भण्डार किए गए सभी पैकजों की हालत की जांच करने और प्रत्येक पैकेज की विनिर्माण विशिष्टियों को पढ़ने के लिए उनके बीच से होकर आ जा सके ।

The explosive packages shall be stocked in such a way so as to allow movement of at least one person to check the condition of all packages stored and to read the manufacture particulars of each package.

तिंडेत चालकों की भूमि के लिए प्रतिरोघ यथासंभव न्यूनतम होगा और किसी भी दशा में 10 ओहा से अधिक नहीं होगा ! The resistance of the lightning conductor to earth shall be as low as possible and in no case be more than 10 ohms.

- 17. मैगजीन के चारों और 15 मीटर की दूरी के अंतर्गत कोई शुल्क घास या झांड़ी या ज्वलनशील सामग्री नहीं रहने दी जाएगी । A distance of 15 meters surrounding the magazine or store house shall be kept clear of dried grass or bush or flammable materials.
- 18. विस्फोटकों के प्रत्येक पैकेट की, जब उसे मैगजीन के भीतर लिया जा रहा हो, ठीक दशा जानने के लिए परीक्षा की जाएगी । Every package of explosive at the time of bringing inside the magazine shall be examined for its sound condition.
- 19. किसी मैगजीन / भंडारगृह में किसी एक समय में चार व्यक्तियों से अधिक को नहीं रहने दिया जाएगा । Not more than 4 persons shall be allowed inside the magazine or store house at any one time.

उप मुख्य विस्फोटक नियंत्र Deputy Chief Controller of Exp एरणाकुलम Ernakulam

20. विस्फोटकों के खाली पैकजों को शीघ्रतिशीघ्र वहां से हटा दिया जाएगा और नष्ट कर दिया जाएगा ।
Empty packages of the explosives shall be removed at the earliest and destroyed. \

21. अनुजिसधारी और कर्मचारीयों को परिसर के भीतर आपातकाल के दौरान की जाने वाली प्रक्रियाओं से अवगत होना चाहिए । The licensee and the employee shall be conversant with procedure to be taken during the emergency within the premises.

22. निरीक्षण या नमूना अधिकारी को सभी युक्तियुक्त समयों पर अनुज्ञत परिसर में अबाध रूप से पहुंचने दिया जाएगा और यह सुनिश्चित करने के लिए कि अधिनियम और इन नियमों के उपबंधों और सुरक्षा स्थितियों को सम्यकतः अनुपालन किया जा रहा है, अधिकारी को प्रत्येक सुविधा प्रदान की जाएगी।

Free access to the licensed premises shall be given at all reasonable times to any inspecting or sampling officer and every facility shall be

afforded to the officer for ascertaining that the provisions of the Act and these rules and the safety conditions are duly observed.

23. यदि अनुज्ञापन प्राधिकारी या विस्फोटक नियंत्रक अनुज्ञितिधारक को अनुज्ञात परिसरों या मशीनरी, दूल या उपकरण में ऐसी कोई मरम्मत या परिवर्धन या परिवर्धन करने या सिफारिशों को लागू करने को लिखित रूप में सूचित करता है जो परिसर के अंदर या बाहर या व्यक्तियों की सुरक्षा के लिए आवश्यक है, अनुज्ञाप्तिधारक सिफारिशों को निष्पादित करेगा और विनिर्दिष्ट अविध के भीतर अनुपालन रिपोर्ट ऐसे प्राधिकारी को देगा।

If the licensing authority or a Controller of Explosives informs in writing, the holder of the licence to execute any repairs or to make any additions or alterations to the licensed premises or machinery, tools or apparatus or carry out recommendations, which are in the opinion of such authority may pose unacceptable risk and so necessary for the safety of either on-site or off-site of the premises or persons, the holder

of the license shall execute the recommendations and report compliance within the period specified by such authority.

24. अनुजितिधारी मैगजीन में रखने और बिक्री के लिए प्राधिकृत विस्फोटक सूची में उल्लिखित अनुजित फैक्टरी या कंपनी से प्राधिकृत विस्फोटक / आतिशबाजी या सुरक्षा पलीते खरीदेगा ।

The licensee shall purchase authorised explosives/ fireworks or safety fuse as mentioned in the list authorised explosives from a licensed

factory or company for possession and sale from the magazine.

25. निम्न से अधिक ध्वनि स्तर उत्पादित करने वाले आतिशबाजियों पटाखों की बिक्री और रखने के लिए -

(क) जो फटने की जगह से चार मीटर की दूरी पर है, 125 डी.बी.(ए1) या 145 डी.बी.(सी)पी.के. प्रतिबंधित होंगे;

(ख) शृंखला (जुड़े हुए पटाख) को गठन करने वाले व्यक्तिगत पटाखों के लिए उपर्युक्त उल्लिखित सीमा 5 लॉग.10(एन) डी.बी. (सी) पी.के.प्रतिबंधित होंगे ;

The possession and sale of fire-crackers generating noise level exceeding;

a) 125 dB(AI) or 145 dB(C)pk at 4 meters distance from the point of bursting shall be prohibited;

b) For individual fire-cracker constituting the series (joined fire-crackers), the above mentioned limit be reduced by 5 log10 (N) dB, where

N = number of crackers joined together.

26. आग या विस्फोट व्दारा दुर्घटना या नुकसान पटाखों की कमी या चोरी, तुरंत पास के पुलिस थाने और अनुजापन प्राधिकारी और अनुजापन प्राधिकारी के स्थानीय कार्यालय को रिपोर्ट की जाएगी।

Accidents by fire or explosion and losses, shortage or theft of explosives shall be immediately reported to the nearest police station and the licensing authority and local office of the licensing authority.

#### अतिरिक्त शर्ते / Additional Conditions :

1. अनुज्ञतीधारी विदेशी मूल के आतिशबाजी को ना प्रदर्शित करेगा, ना रखेगा और ना ही उसकी बिक्री करेगा। The licensee shall not exhibit, possess and sell fireworks of foreign origin.

कृते संयुक्त मुख्य विस्फोटक नियंत्रक For Joint Chief Controller of Explosives दक्षिणांचल, चेन्ने | South Circle, Chennai उप मुख्य विस्फोटक नियंत्रक Deputy Chief Controller of Explosives एरणाकुलम Ernakulam

## Form DE-2 (See rule 113 of the Explosives Rules, 2008) (Distance Form to be attached to the licence)

### **Annexure-7**

Safety distances required to be kept clear around magazine for high explosives or fire works or factory licence number E/SC/KL/22/746(E32353) in form LE-3 granted to Shri C.G.George, Chittath House, Kuthuparamba post, Kerala-.

Type of Structure(s)	Safety distances meters	
Inside Safety Distances(ISD)	M	UM
	13	19
Room or Workshop used in Connection with the Magazine Any other Explosives Magazine or store House or Factory of the Applicant		
Magazine Office		
Widgazine Office		
Middle Safety Distances(MSD)		
Magazine Keeper's or Chowkidar's Dwelling house		
Railway including Minerals and Private Railways		
Canal (in active use) or other navigable water		
Dock or Pier or Jetty		40
Public Highway or Public Road	Church	
Private Road which is PRINCIPAL means of access to a Temple, Mosque	, Church,	
Gurudwara or other places of worships, Hospital, College, School or Facto	1)	
10 River Embankment or Sea Embankment or Public Well		
11 Reservoir or Bounded tank/rope way		
12 Windmillor or Solar panel for Power Generation		
Outside Safety Distances(OSD)		
13 Dwelling House		
14 Govt. and Public Building		
15 Temple, Mosque, Church or Gurudwara or other Places of Worships	School	
16 Shops, Market place, Public recreation and Sports Ground, College	stomed to	
Hospital, Theater, Cinema or other Building where the public are accu-	stomed to	
assemble		
17 Factory	s. or other	
18 Buildings or Works used for the Storage in Bulk of Petroleum, Sprit, ga	,	45
inflammable or hazardous substances 19 Building or Works used for Storage and Manufacture of Explosives or	of articles	
19 Building or Works used for Storage and Manufacture of Employing		
which contain Explosives		
20 Aerodrome		
21 Furnace, Kılın or Chimney		
22 Quarry or mine pit head 23 Power House or Electric Substation		
24 Wireless Station		
25 Warehouse or other Storage Building		
26 Any other Protected works		
Overhead Electric lines		15
27 Electric Power over head Transmission Lines above 440V		45 15
28 Electric Power over head Transmission Lines upto 440V		


The Date: 16/12/2005

#### Amendments:

- Amendment of Quantity of Explosives/Monthly Purchase Limit dated: 23/08/2012
- Amendment of Quantity of Explosives/Monthly Purchase Limit dated: 22/07/2014
- Amendment of Quantity of Explosives/Monthly Purchase Limit dated: 13/01/2015
- Amendment in Drawings/Facilities/Premises dated: 23/08/2016
- Amendment of Quantity of Explosives/Monthly Purchase Limit dated: 22/12/2017

For Joint Chief Controller of Explosives South Circle, Chennai

उप मुख्य विस्फोटक नियंत्रक Deputy Chief Controller of Explosives एरणाकुलम Ernakulam



നമ്പര്: 29/2019-2020/A-5/1092/19

തീയതി: 01/04/2019

Kunnothparamba Grama Panchay P. O. Thuvakkunnu

കുന്നോത്തുപറമ്പ് ഗ്രാമപഞ്ചായത്ത്

Kannur Dist, Pano (A) Son

### കൂന്നോത്തൂപറമ്പ് ഗ്രാമപഞ്ചായത്ത്

തൂവ്വക്കുന്ന് പി.ഒ., കണ്ണൂർ (ജില്ല)

പിന് : 670693, ഫോണ് : 4902391430, ഇ-മെയില് : secretaryknp@gmail.com

വൃവസായം, വാണിജ്യം, സംരഭകത്വം, മറ്റ് സേവനങ്ങൾക്കുള്ള ലൈസൻസ്

(കെ.പി.ആർ ആക്ട് സെക്ഷൻ 232, FACTEOS ലൈസൻസ് ചട്ടങ്ങൾ 1996)

ലൈസൻസിയുടെപേര്	സി. ജി ജോർജ്ജ്				
ലൈസൻസിയുടെ മേൽവിലാസം	ചിറ്റേത്ത് ഹൌസ് , കുത്തൂപറമ്പ് -670643 , 9544400106				
സ്ഥാപനത്തിന്റെ പേരും, സ്ഥലനാമവും	M/s QUARRY OWNED BY SRI GEORGE, CHERIKKAL,CHERUPARAMBA , KANNUR DIST				
ലൈസൻസ് നൽകിയിട്ടുള്ള പ്രവർത്തനങ്ങൾ	കരിങ്കൽ ഖനനം നടത്തുന്നതിന്				
വാർഡ് നമ്പർ/കെട്ടിട നമ്പർ	III/RS NO88/1,89/2 B,139/1,147/2				
ലൈസെൻസ് കാലാവധി	01/04/2019 മുതൽ 31/10/2019 വരെ				
	തുക	രസീത് നമ്പർ	തീയതി		
ലൈസെൻസ് ഫീസ്	25000 /- രൂപ	118040110154	18/03/2019		
മോട്ടോർ ഫീസ്		118040110154	18/03/2019		
തൊഴിൽ നികുതി					
ലൈസെൻസ് അനുവദിക്കുന്നതിന് ഹാജരാക്കിയ നിരാക്ഷേപ പത്രങ്ങളുടെ വിശദാംശങ്ങൾ (നമ്പർ, തീയതി, കാലയളവ്, നൽകിയ അധികാര സ്ഥാപനം )	1. PCB/RO/KNR/IC/114 VALIDITY 31/10/201 2. ചീഫ് കൺട്രോളർ	ർ ഓഫ് എക്സ്പ്ലോസീവ 6(E32353) Renewed upto 31/0 lity 27/12/2028	പത്രം, ( ப് ലൈസൻസ്		

ഓഫീസ് മുദ്ര